

MICRO ODF Outlet 2-4 Ports

DESCRIPTION

This MICROLINK compact termination box is designed for use in residential and business applications for the termination of up to four fibers. This wall box enables the installation of either Drop cable or ruggedized cables to be spliced to 2-4 SC Pigtails.

FEATURES AND BENEFITS

- ✓ Accepts LC duplex or SC simplex adaptors
- ✓ Ergonomic Design
- ✓ Simple cable routing and bending radius for pigtails.
- ✓ Removable cover for easy access.
- ✓ Hinged splice tray holds up to 8 heatshrink splice protectors
- ✓ Multiple cable entry points
- ✓ For use with flangeless adaptors.



APPLICATION

FTTH and FTTX Networks.
Data communication Networks.
Indoor Application.



STANDARDS

IEC 61754-1:2013
ISO/IEC 11801-1:2017
EN 50173-1:2011
UL-94-V-0
RoHS Compliant



High Quality



Fiber Simplex
Connector



Angled (ACP)
Connector



Finest Precision



Durability




MICRO ODF Outlet 2-4 Ports

TECHNICAL SPECIFICATIONS

| PHYSICAL CHARACTERISTICS | DESCRIPTION |
|--------------------------|------------------------|
| Width x Depth x Height | 86 x 86 x 24.2 mm |
| No. of Port | 4 Port of SC Simplex |
| Max. Splicing Capacity | 8 Splices |
| Suitable Adapter Type | SC Simplex / LC Duplex |
| Material | ABS Plastic |
| Operating Temperature | -20 °C +85°C |
| Color | White |
| Weight | 83 g |

TECHNICAL DRAWING

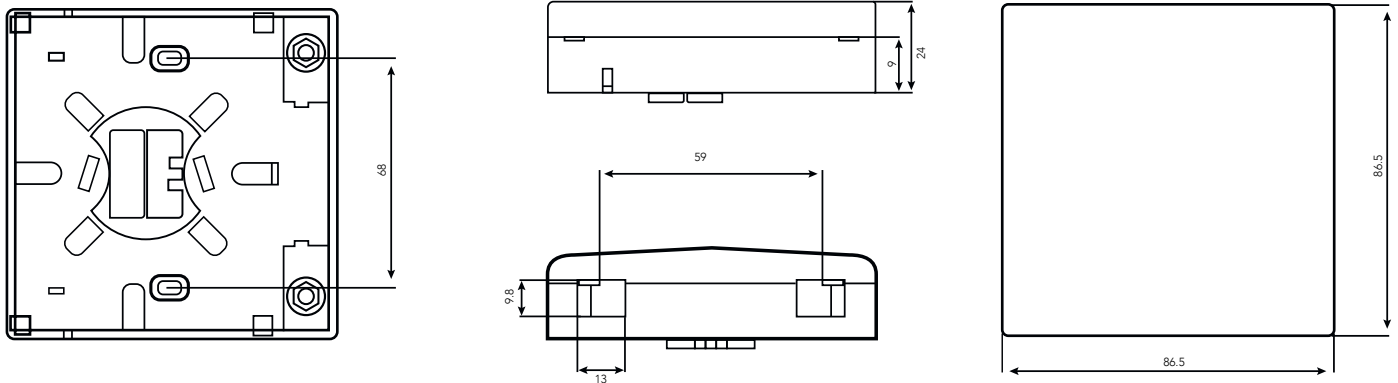

ORDER INFORMATION

| PART NUMBER | DESCRIPTION |
|-------------|--|
| MK-2PODF-WM | 2 Port SC SX / LC DX FTTH Wall outlet - unloaded |
| MK-4PODF-WM | 4 Port SC SX / LC DX FTTH Wall outlet - unloaded |

USA & CANADA

Tel +1-877-6774040
 info@microlinknet.com
 70 East Sunrise Highway Valley Stream,
 NY 11581, New York

EUROPE

Tel +44-20-37695558
 uk@microlinknet.com
 4th Floor, 18 St. Cross Street,
 London, EC1N 8UN

MIDDLE EAST

Tel +971 4 556 1557
 mena@microlinknet.com
 Boulevard Plaza Tower One, Level 3,
 Downtown Dubai, United Arab Emirates

