


SINGLE OPEN SYSTEM RACK CABINET

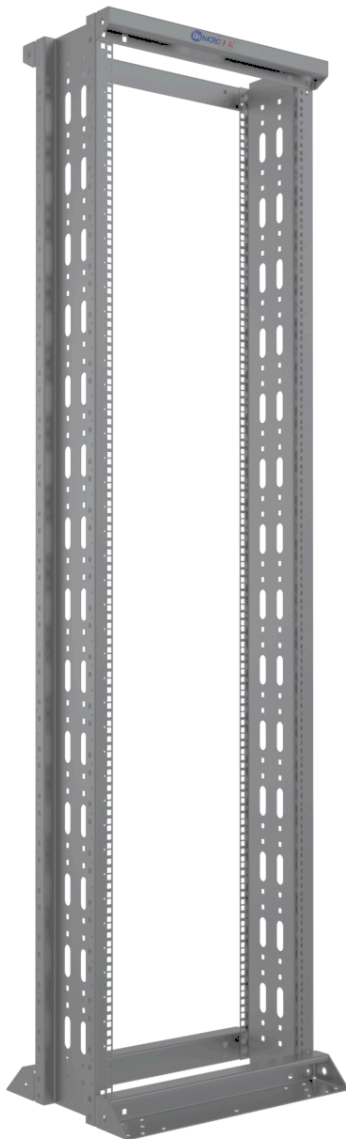

DESCRIPTION

Open System Roofs: designed to be used where easy access to devices and system is required. It is suitable for use in clean, safe, air-conditioned environments. It can be used in network solutions as well as as a server cabinet. It has a safe, solid steel construction structure, 6 twisted solid carrier profile structure, easy cabling, high quality production, modular structure, economic transportation and ease of shipment.

Open System Roofs are suitable for wearing top hats when desired. Optionally, it is shipped as assembled or demounted.

Color options are RAL 7035 light gray and RAL 9005 black.



High Quality



Finest Precision



Durability

GENERAL FEATURES

- 300 kg load carrying capacity
- Wide measuring range; 16U/22U/26U/36U/42U/47U Width; 536mm.
- Single roof for 19" front mounting
- Depth for single roofs 80mm-160mm
- Standard colors; RAL 9005 Black & RAL 7035 Light Gray
- Corner profiles are suitable for the use of standard accessory cable loops.
- It has pinion feet as standard.
- Provides easy and fast access to equipment.

Product code	Product Description D=100 mm	Dimensions (W*H*D)	Product code	Product Description D=200 mm	Dimensions (W*H*D)
MC.OPR16US100.C0	16U Single Open System D=100mm	540x710x80mm	MC.OPR16US200.C0	16U Single Open System D=200mm	540x710x160mm
MC.OPR26US100.C0	26U Single Open System D=100mm	540x1200x80mm	MC.OPR26US200.C0	26U Single Open System D=200mm	540x1200x160mm
MC.OPR36US100.C0	36U Single Open System D=100mm	540x1700x80mm	MC.OPR36US200.C0	36U Single Open System D=200mm	540x1700x160mm
MC.OPR42US0.C0	42U Single Open System D=100mm	540x2000x80mm	MC.OPR42US200.C0	42U Single Open System D=200mm	540x2000x160mm

